

# ECOMAX PLUS SERIES

GLASSWASHERS






Undercounter Glasswasher

ECO+G415-11C



1 2 3

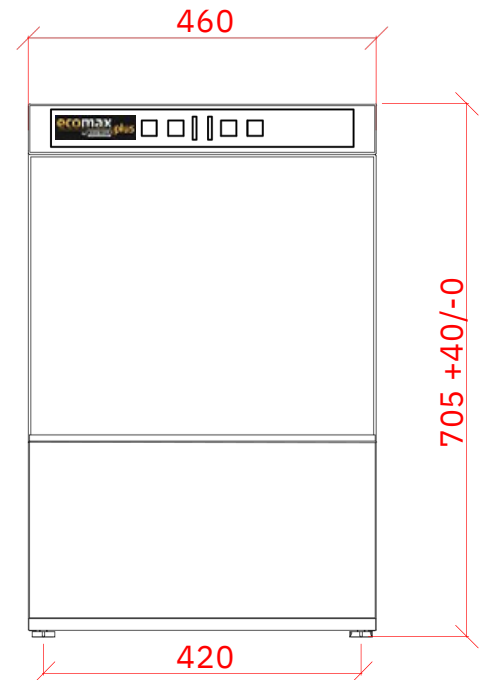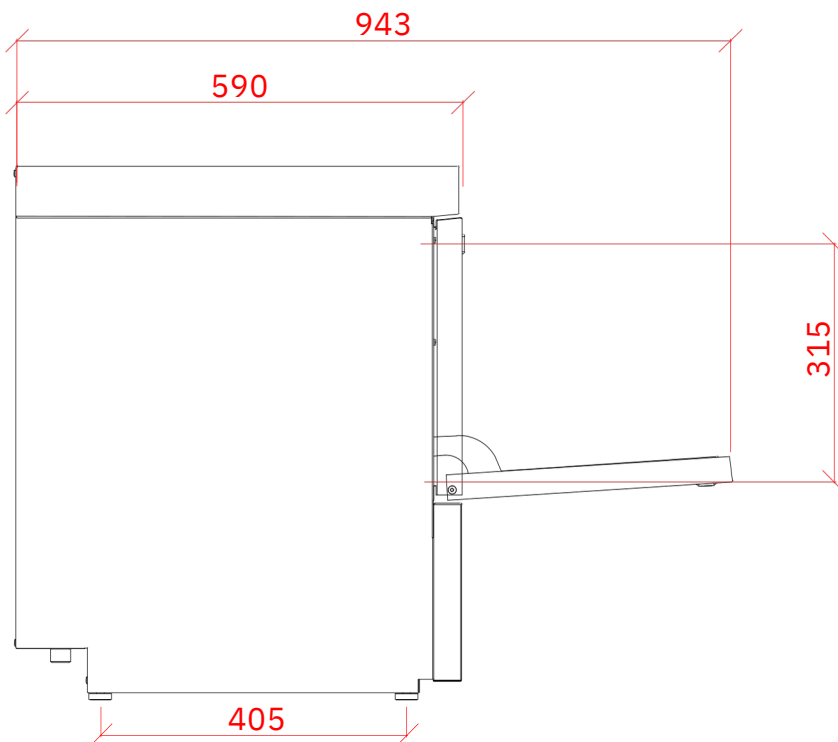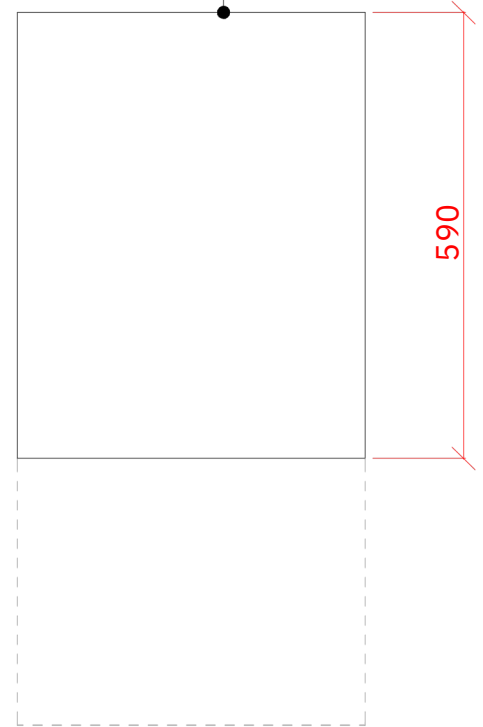

<p><b>Water</b></p> <p>22mm CONNECTION VIA 2 METRE FLEXIBLE HOSE, FEMALE TERMINATION.</p> <p>WATER SUPPLY 10°C TO 60°C (2° TO 8° CLARK MAX)@ 0.6 TO 10.0 BAR MAX. INITIAL TANK FILL 8.0 LITRES. RINSE WATER USAGE 2.9 LITRES PER CYCLE. MAX USAGE 60 CYCLES PER HOUR. OUR MACHINES ARE SUPPLIED WITH CLASS 'AB' AIR GAP AS STANDARD.</p>	<p><b>Drain</b></p> <p>2 METRE FLEXIBLE HOSE TO A 40 mm TRAPPED STANDPIPE 600mm MAX A.F.F.L. FLOW RATE 30 LITRES PER MINUTE.</p>	<p><b>Electric</b></p> <p>2.7kW 230/50/1 FUSED AT 13amps CONFIGURABLE TO; 4.0kW 230/50/1 FUSED AT 20 amps or 5.4kW 400/50/3 FUSED AT 15amps. MACHINE SUPPLIED WITH 1.5 METRES OF CABLE</p>
<p><b>Other Services</b></p> <p>RINSE AGENT HOSE - 2.5 METRE FLEXIBLE. APPROX WEIGHTS: DETERGENT HOSE - 2.5 METRE FLEXIBLE. EMPTY: 50kg's WITH WATER: 62.5kg's +40mm FEET HEIGHT ADJUST</p>		<p><b>Notes</b></p>

PLOT SCALE: 1:10

RIGHT TO MAKE NECESSARY CHANGES IS RESERVED