
INDEPENDENT ISOLATING VALVE





Front Loading Utensil Washer

UP-10B





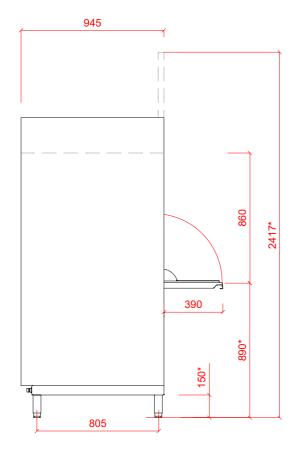

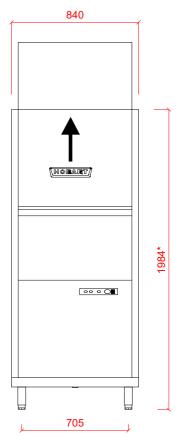

2 Drain Water 3 Electric DRAIN - 2 METRE FLEXIBLE HOSE TO A 40 mm 2 x 22mm CONNECTIONS EACH VIA 1.5 METRE 18.0kW 400/50/3 FUSED AT 3 x 32amps. FLEXIBLE HOSE, FEMALE TERMINATION. TRAPPED STANDPIPE 800mm MAX A.F.F.L. Configurable to: 1 x WATER SUPPLY UP TO 65°C @ 0.5 TO 10 BAR MAX. 15.3kW 400/50/3 Fused At 3 x 25amps. INITIAL TANK FILL 80 LITRES. FLOW RATE 30 LITRES PER MINUTE. 21.3kW 400/50/3 Fused at 3 x 35amps. 1 x WATER SUPPLY UP TO 15°C RINSE WATER USAGE MACHINE SUPPLIED WITH 1.8 METRES OF CABLE 8.0 LITRES PER MAX USAGE 240 LITRES PER HOUR. Other Services **Notes** OUR MACHINES ARE SUPPLIED WITH CLASS 'AB' AIR APPROX WEIGHTS: RINSE AGENT HOSE - 2.5 METRE FLEXIBLE. GAP AS STANDARD.WATER SUPPLY TO HAVE EMPTY: 205kg's

DETERGENT HOSE - 2.5 METRE FLEXIBLE.

HEIGHTS MARKED * REPRESENT ±25mm