
## WATER SOFTENERS AND PRESSURE PUMPS WATER TREATMENT



**Water Treatment Unit - Duplex Version** 

SD-H

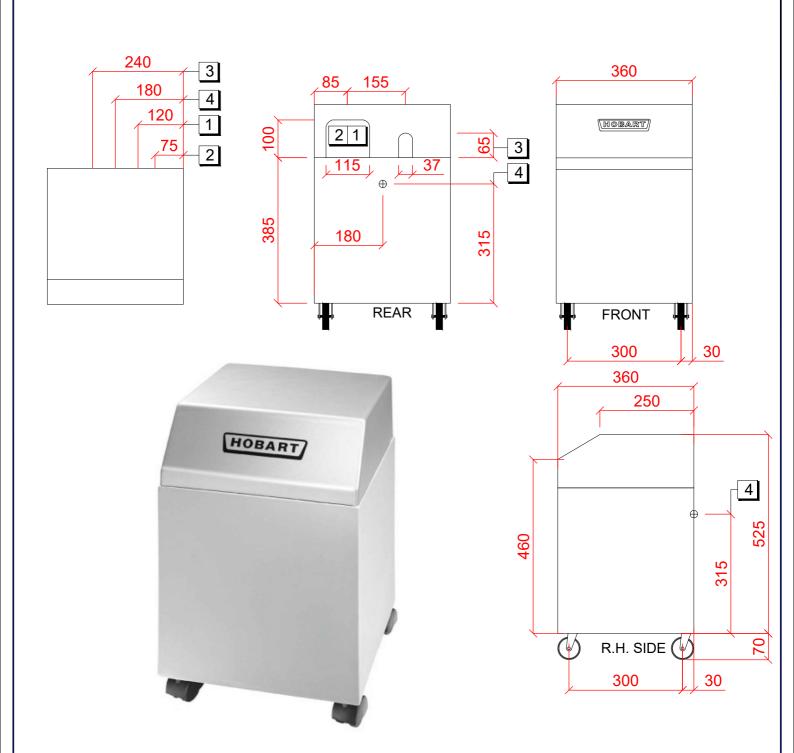

## 2 Drain Water 3 Electric NO ELECTRIC LOADING REQUIRED 1. INLET: 1.5 METRE HOSE WITH 3/4" B.S.P. 3. PUMPED DRAIN: 1/2" O/D SEMI-RIGID **FEMALE TERMINATION** 2 METRE HOSE AND THEN TO A 40mm 2°C MIN TO 65°C MAX. TRAPPED STANDPIPE AT 700mm A.F.F.L 2.0 TO 6.0 BAR. 4. OVERFLOW: 1/2" BARBED FITTING. 2. OUTLET: 1.5 METRE HOSE WITH 3/4" B.S.P. (THIS IS FOR A VISIBLE SIGN OF ANY FEMALE TERMINATION. Notes OVERFLOW AND SHOULD NOT BE CONNECTED IN SUCH A WAY AS NOT SALT TABLETS ONLY -WATER SUPPLY TO HAVE INDEPENDENT TO BE VISIBLE) NOT GRANULAR OR POWDER ISOLATING VALVE.

PLOT SCALE: 1:10